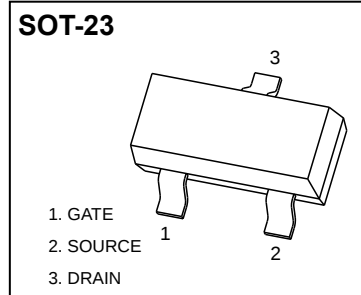


**SOT-23 Plastic-Encapsulate MOSFETS****BSS123 N Channel MOSFET**


| $V_{(BR)DSS}$ | $R_{DS(on)MAX}$ | $I_D$ |
|---------------|-----------------|-------|
| 100 V         | 6Ω@10V          | 0.17A |
|               | 10Ω@4.5V        |       |

**FEATURE**

- Surface Mount Package
- High Density Cell Design for Extremely Low  $R_{DS(ON)}$
- Voltage Controlled Small Signal Switch
- Rugged and Reliable

**APPLICATION**


- Small Servo Motor Controls
- Power MOSFET Gate Drivers
- Switching Application

**MARKING**

Front side

B123= Device code

Solid dot = Green molding compound device.

**Equivalent Circuit****ABSOLUTE MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$  unless otherwise noted)**

| Parameter                                                        | Symbol          | Value    | Unit                 |
|------------------------------------------------------------------|-----------------|----------|----------------------|
| <b>N-MOSFET</b>                                                  |                 |          |                      |
| Drain-Source Voltage                                             | $V_{DS}$        | 100      | V                    |
| Gate-Source Voltage                                              | $V_{GS}$        | ±20      | V                    |
| Continuous Drain Current (note 1)                                | $I_D$           | 0.17     | A                    |
| Pulsed Drain Current ( $t_p=10\mu\text{s}$ )                     | $I_{DM}$        | 0.68     | A                    |
| Continuous Source-Drain Diode Current                            | $I_S$           | 0.17     | A                    |
| Power Dissipation                                                | $P_D$           | 0.35     | W                    |
| Thermal Resistance from Junction to Ambient (note 1)             | $R_{\theta JA}$ | 357      | $^{\circ}\text{C/W}$ |
| Operation Junction and Storage Temperature Range                 | $T_J, T_{STG}$  | -55~+150 | $^{\circ}\text{C}$   |
| Lead Temperature for Soldering Purposes(1/8" from case for 10 s) | $T_L$           | 260      | $^{\circ}\text{C}$   |

## MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$  unless otherwise specified


| Parameter                            | Symbol               | Test Condition                                                                            | Min | Typ  | Max  | Unit |
|--------------------------------------|----------------------|-------------------------------------------------------------------------------------------|-----|------|------|------|
| STATIC CHARACTERISTICS               |                      |                                                                                           |     |      |      |      |
| Drain-source breakdown voltage       | V <sub>(BR)DSS</sub> | V <sub>GS</sub> = 0V, I <sub>D</sub> =250μA                                               | 100 |      |      | V    |
| Zero gate voltage drain current      | I <sub>DSS</sub>     | V <sub>DS</sub> =100V, V <sub>GS</sub> = 0V                                               |     |      | 1    | μA   |
|                                      |                      | V <sub>DS</sub> =20V, V <sub>GS</sub> = 0V                                                |     |      | 10   | nA   |
| Gate-body leakage current            | I <sub>GSS</sub>     | V <sub>GS</sub> =±20V, V <sub>DS</sub> = 0V                                               |     |      | ±50  | nA   |
| Gate threshold voltage (note 2)      | V <sub>GS(th)</sub>  | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA                                  | 1   | 1.6  | 2    | V    |
| Drain-source on-resistance(note 2)   | R <sub>DS(on)</sub>  | V <sub>GS</sub> =4.5V, I <sub>D</sub> =0.17A                                              |     | 3.8  | 10   | Ω    |
|                                      |                      | V <sub>GS</sub> =10V, I <sub>D</sub> =0.17A                                               |     | 3.5  | 6    | Ω    |
| Forward tranconductance(note 2)      | g <sub>FS</sub>      | V <sub>DS</sub> =10V, I <sub>D</sub> =170mA                                               | 80  |      |      | mS   |
| Diode forward voltage                | V <sub>SD</sub>      | I <sub>S</sub> =340mA, V <sub>GS</sub> = 0V                                               |     |      | 1.3  | V    |
| DYNAMIC CHARACTERISTICS (note 4)     |                      |                                                                                           |     |      |      |      |
| Input Capacitance                    | C <sub>iss</sub>     | V <sub>DS</sub> =25V, V <sub>GS</sub> =0V, f =1MHz                                        |     | 29   | 60   | pF   |
| Output Capacitance                   | C <sub>oss</sub>     |                                                                                           |     | 10   | 15   | pF   |
| Reverse Transfer Capacitance         | C <sub>rss</sub>     |                                                                                           |     | 2    | 6    | pF   |
| SWITCHING CHARACTERISTICS (note 3,4) |                      |                                                                                           |     |      |      |      |
| Turn-on delay time                   | t <sub>d(on)</sub>   | V <sub>GS</sub> =10V, V <sub>DD</sub> =30V, I <sub>D</sub> =0.28A, R <sub>GEN</sub> =50 Ω |     |      | 8    | ns   |
| Turn-on rise time                    | t <sub>r</sub>       |                                                                                           |     |      | 8    | ns   |
| Turn-off delay time                  | t <sub>d(off)</sub>  |                                                                                           |     |      | 13   | ns   |
| Turn-off fall time                   | t <sub>f</sub>       |                                                                                           |     |      | 16   | ns   |
| Total Gate Charge                    | Q <sub>g</sub>       | V <sub>DS</sub> =10V, I <sub>D</sub> =0.22A, V <sub>GS</sub> =10V                         |     | 1.4  | 2    | nC   |
| Gate-Source Charge                   | Q <sub>gs</sub>      |                                                                                           |     | 0.15 | 0.25 | nC   |
| Gate-Drain Charge                    | Q <sub>gd</sub>      |                                                                                           |     | 0.2  | 0.4  | nC   |

### Notes :





- 1.Surface mounted on FR4 board using the minimum recommended pad size.
2. Pulse Test : Pulse width=300 $\mu$ s, duty cycle $\leq$ 2%.
3. Switching characteristics are independent of operating junction temperature.
4. Graranted by design, not subject to producing.

# Typical Characteristics


Output Characteristics

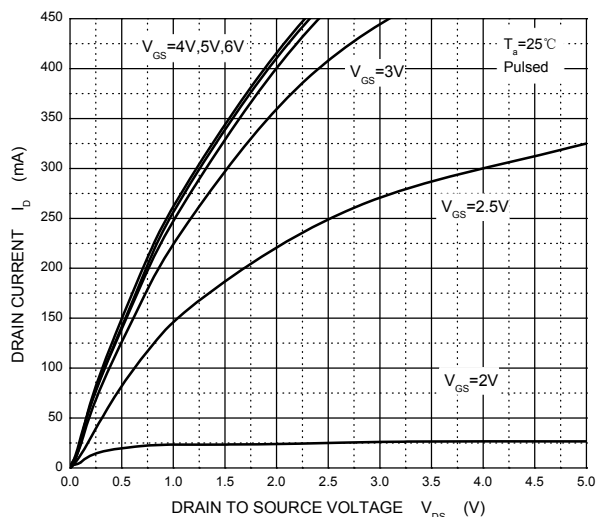


Transfer Characteristics

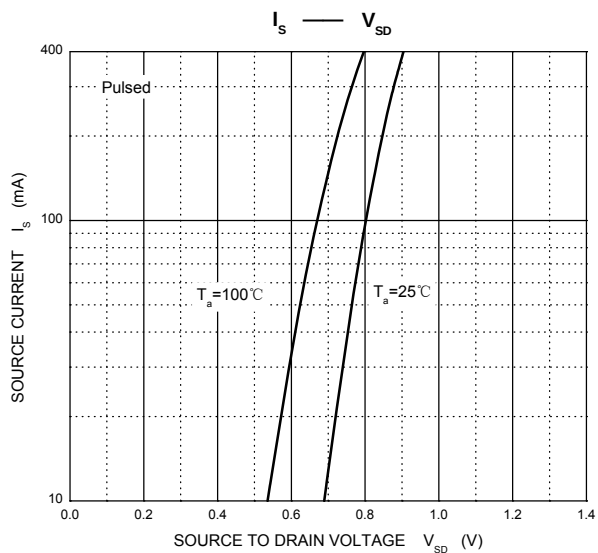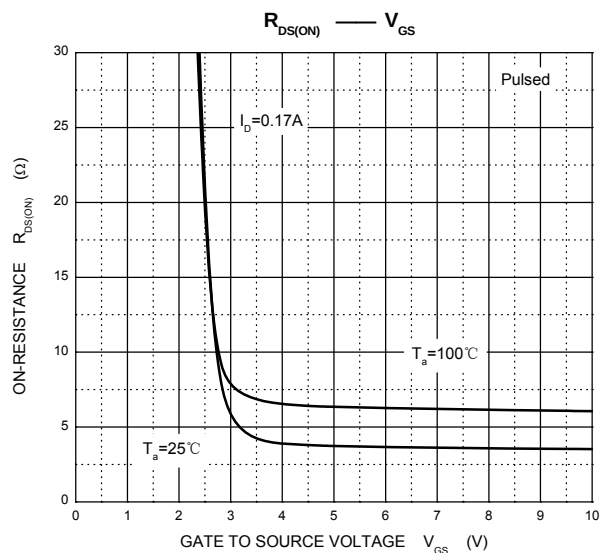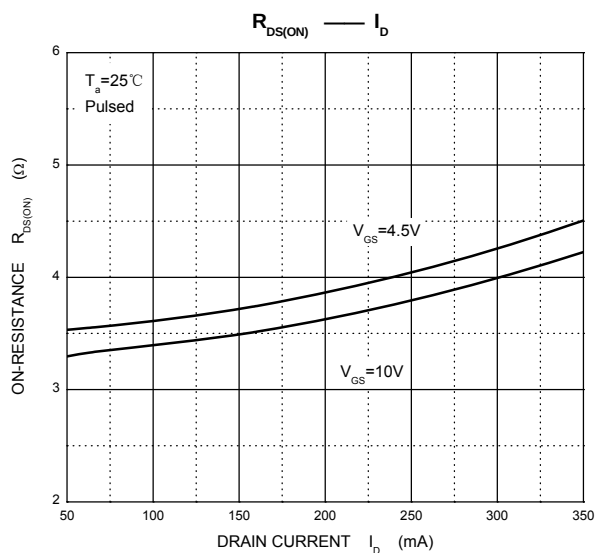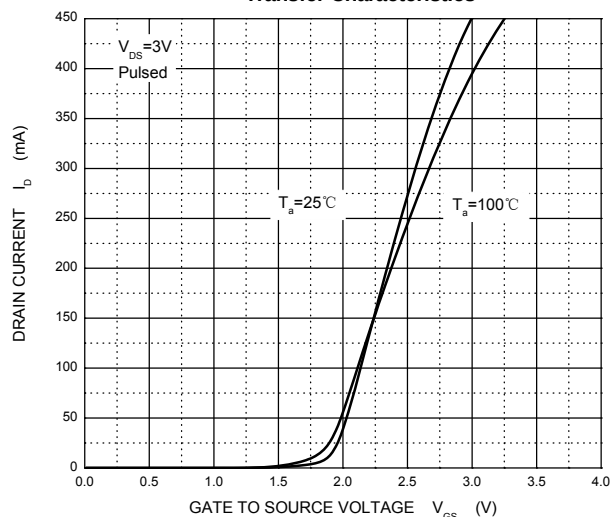

Threshold Voltage

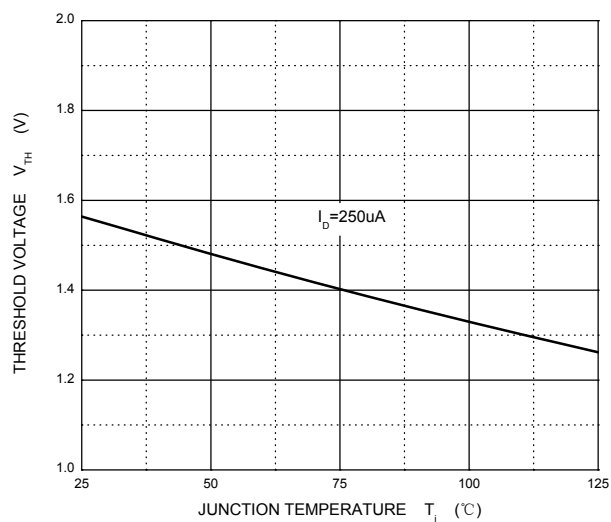


## SOT-23 Package Outline Dimensions

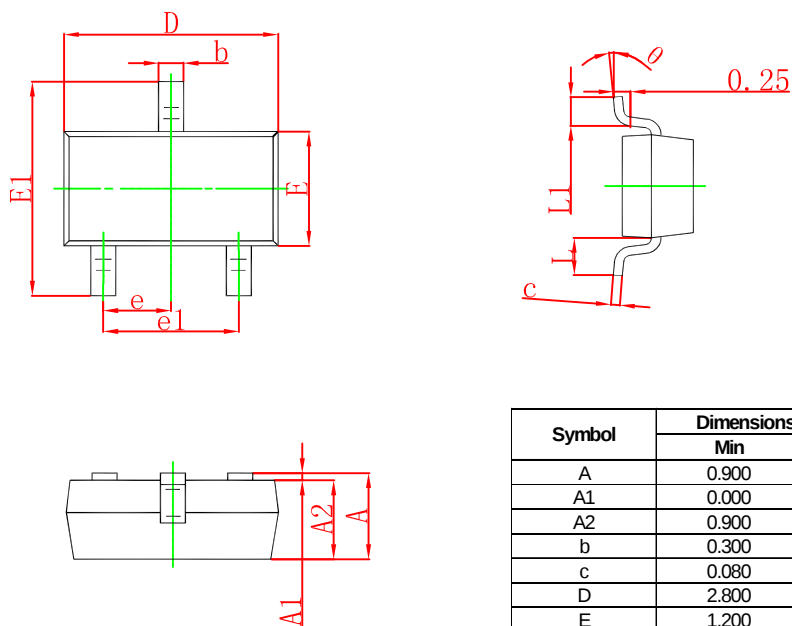

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 0.900                     | 1.050 | 0.035                | 0.041 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 2.800                     | 3.000 | 0.110                | 0.118 |
| E      | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1     | 2.250                     | 2.550 | 0.089                | 0.100 |
| e      | 0.950 TYP                 |       | 0.037 TYP            |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.550 REF                 |       | 0.022 REF            |       |
| L1     | 0.300                     | 0.500 | 0.012                | 0.020 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## SOT-23 Suggested Pad Layout




Note:  
 1. Controlling dimension: in millimeters.  
 2. General tolerance:  $\pm 0.05$  mm.  
 3. The pad layout is for reference purposes only.

### NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

SOT-23 Tape and reel


SOT-23 Embossed Carrier Tape

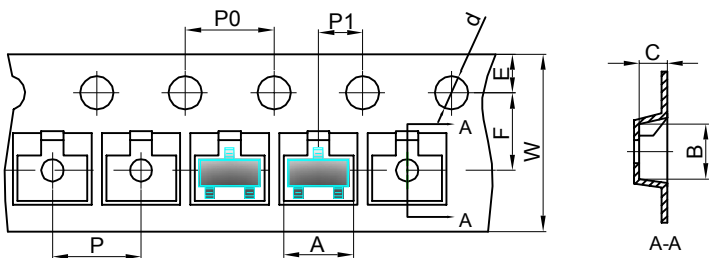


Packaging Description:  
SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| SOT-23                       | 3.15 | 2.77 | 1.22 | Ø1.50 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-23 Tape Leader and Trailer

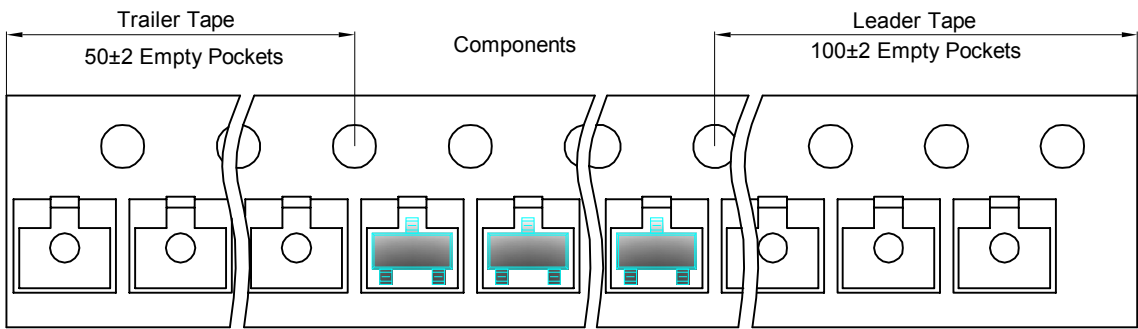

SOT-23 Reel

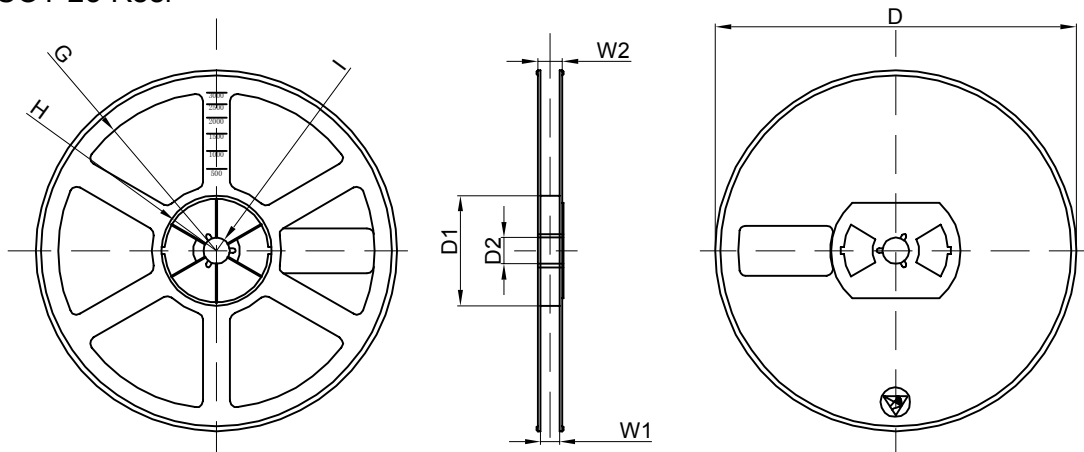

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL     | Reel Size | Box        | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch    | 45,000 pcs | 203×203×195  | 180,000 pcs | 438×438×220     |          |