RClamp3521P
Ultra-Low Capacitance 1-Line, 3.5V ESD protection

PROTECTION PRODUCTS - RailClamp®

Description

RClamp®3521P provides ESD protection for USB3.0 and other high-speed ports. It may be used to meet the ESD immunity requirements of IEC 61000-4-2. RClamp3521P is designed to minimize both the ESD peak clamping and the TLP clamping. The dynamic resistance is minimized (0.47 Ohms typical) for optimum protection of sensitive circuits. Maximum capacitance is only 0.40pF. This allows the RClamp3521P to be used in applications operating in excess of 5GHz without appreciable signal attenuation. These devices are manufactured using Semtech's proprietary low voltage technology for superior electrical characteritics.

RClamp3521P is in a 2-pin SLP1006P2 package. It measures 1.0 x 0.6 x 0.5mm. Leads are spaced at a pitch of 0.65mm and are finished with lead-free NiPdAu. Each device will protect one line operating up to 3.5 volts.

The combination of low peak ESD clamping, low dynamic resistance, and low capacitance makes this device suitable for applications such as USB 3.0, audio and V-By-One interfaces in portable devices.

Features

- Transient protection for data lines to
  IEC 61000-4-2 (ESD) ±17kV (air), ±12kV (contact)
  IEC 61000-4-4 (EFT) 40A (tp = 5/50ns)
  Cable Discharge Event (CDE)
- Ultra-small package (1.0 x 0.6 x 0.5mm)
- Protects one data or I/O line
- Low capacitance: **0.40pF**
- Dynamic Resistance: 0.47 Ohms Typical
- Low ESD clamping voltage
- Operating voltage: 3.5V
- Solid-state silicon-avalanche technology

Mechanical Characteristics

- SLP1006P2 package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking code
- Packaging: Tape and Reel
- Lead Finish: NiPdAu
- Pb-Free, Halogen Free, RoHS/WEEE Compliant

Applications

- USB 2.0 / USB 3.0
- V-By-One
- Display Port
- MHL / MDDI
- LVDS Interfaces
- eSATA Interfaces

Dimensions

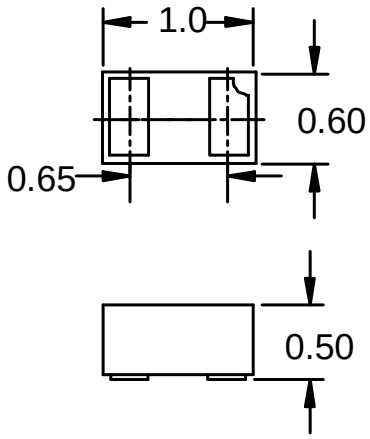

Nominal Dimensions (mm)

Schematic & Pin Configuration



SLP1006P2 (Bottom View)

Downloaded from Arrow.com.

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power (tp = 8/20µs)	P_{pk}	50	Watts
Maximum Peak Pulse Current (tp = 8/20µs)	I_{pp}	4	Amps
ESD per IEC 61000-4-2 (Air)[1] ESD per IEC 61000-4-2 (Contact)[1]	V_{ESD}	+/- 17 +/- 12	kV
Operating Temperature	T_J	-40 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics (T=25°C)

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				3.5	V
Breakdown Voltage	V_{BR}	I_{BR} = 1mA	4.5	6.7	8.5	V
Reverse Leakage Current	I_R	V_{RWM} = 3.5V		0.01	0.05	µA
Clamping Voltage	V_C	I_{PP} = 1A, tp = 8/20µs		9.5	10	V
Clamping Voltage	V_C	I_{PP} = 4A, tp = 8/20µs		10.5	13	V
ESD Clamping Voltage[2]	V_C	I_{PP} = 4A, tlp = 0.2/100ns		8.8		V
ESD Clamping Voltage[2]	V_C	I_{PP} = 16A, tlp = 0.2/100ns		14.5		V
Trigger Voltage[2]	V_{TRIG}	tlp = 0.2/100ns		8		V
Dynamic Resistance[2, 3]	R_{DYN}	tlp = 0.2 / 100ns		0.47		Ohms
Junction Capacitance	C_j	V_R = 0V, f = 1MHz		0.33	0.40	pF

Notes
1)ESD gun return path connected to ESD ground reference plane.
2)Transmission Line Pulse Test (TLP) Settings: t_p = 100ns, t_r = 0.2ns, I_{TLP} and V_{TLP} averaging window: t_1 = 70ns to t_2 = 90ns.
3) Dynamic resistance calculated from I_{pp} = 4A to I_{pp} = 16A
4) Device is electrically symmetrical

Downloaded from Arrow.com.

Typical Characteristics

Clamping Voltage vs. Peak Pulse Current

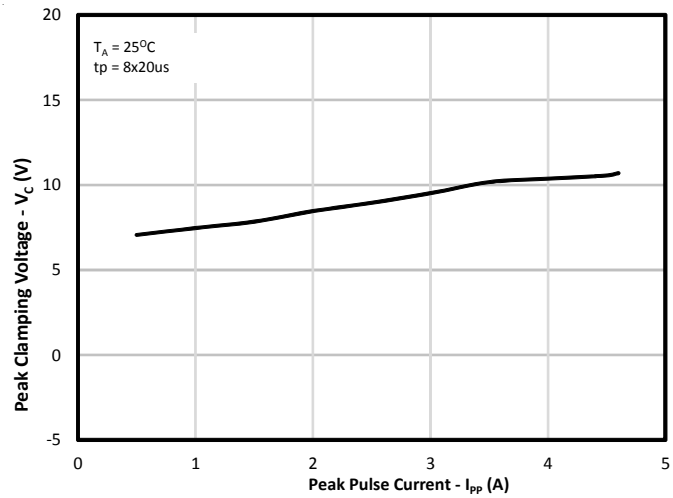

Capacitance vs. Reverse Voltage

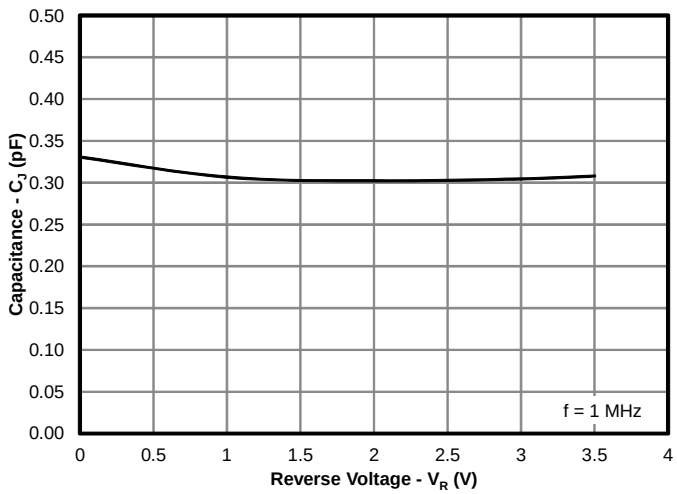

Typical Insertion Loss (S21)

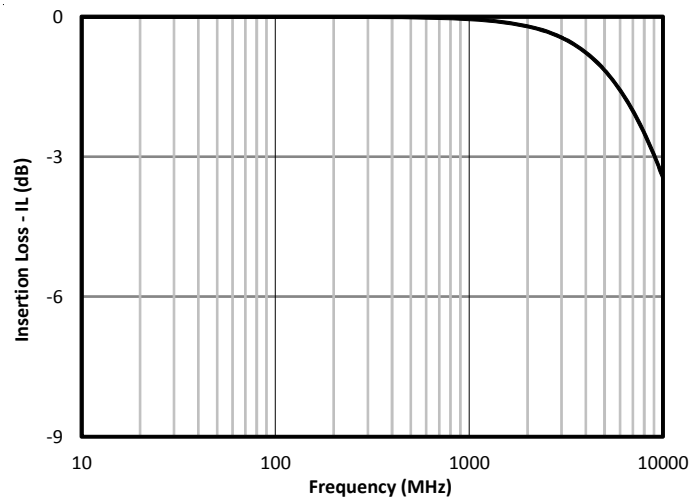

TLP Characteristic

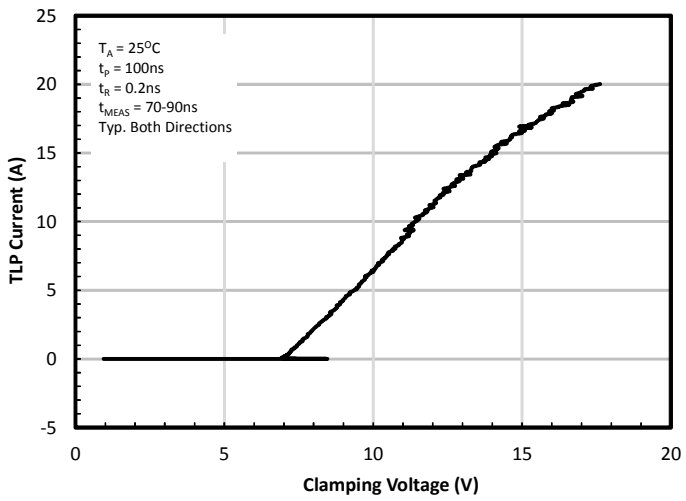

ESD Clamping (+8kV Contact per IEC 61000-4-2)

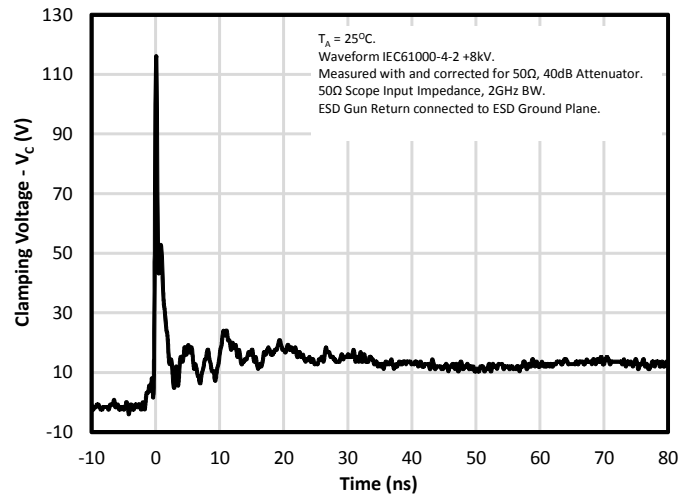

ESD Clamping (-8kV Contact per IEC 61000-4-2)

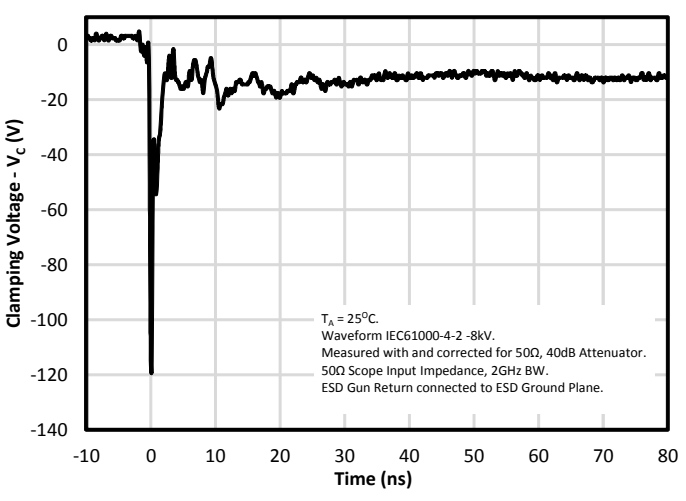

Downloaded from Arrow.com.

Applications Information

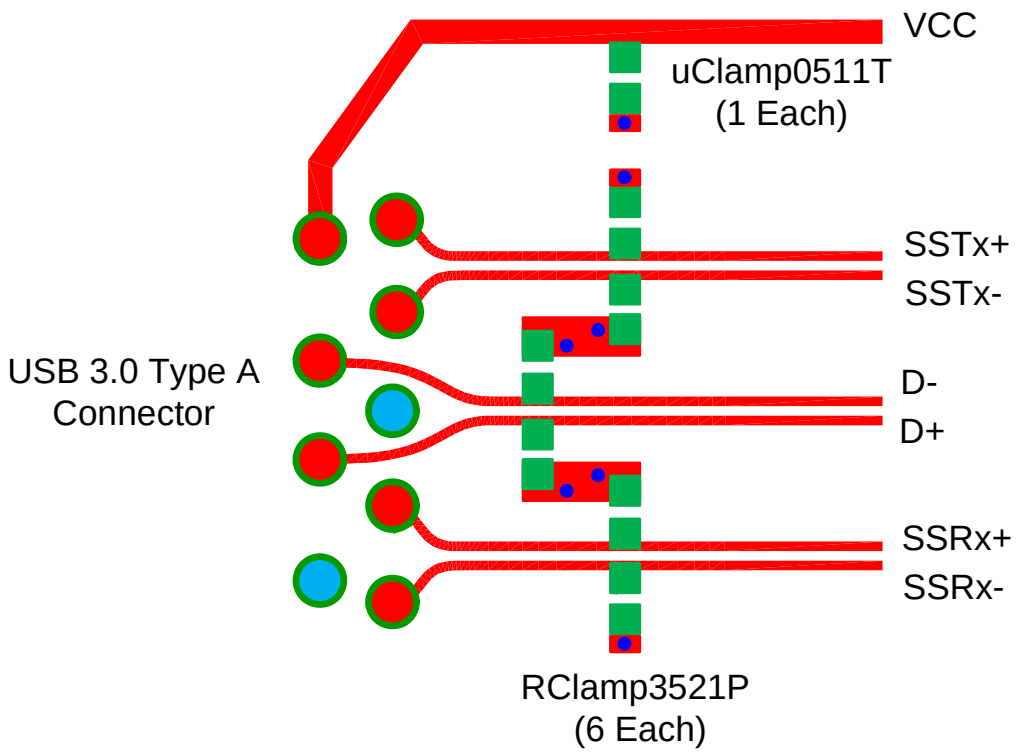

USB 3.0 Layout Diagram

Downloaded from Arrow.com.

Outline Drawing - SLP1006P2

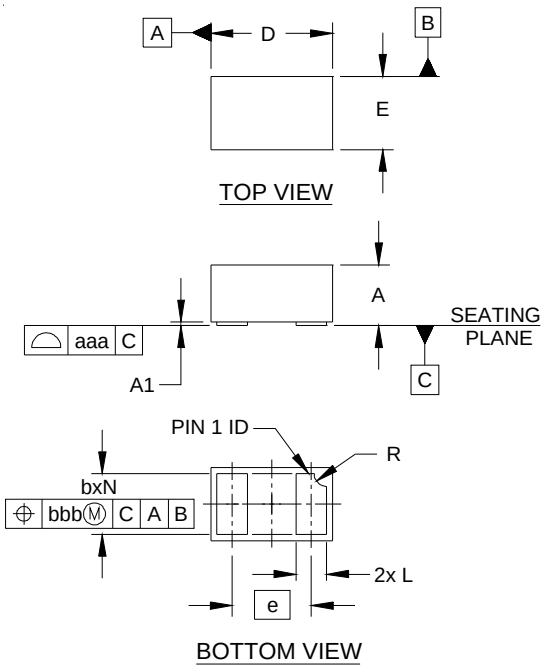

DIMENSIONS						
DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.016	.020	.022	0.40	0.50	0.55
A1	.000	.001	.002	0.00	0.03	0.05
b	.018	.020	.022	0.45	0.50	0.55
D	.035	.039	.043	0.90	1.00	1.10
E	.020	.024	.028	0.50	0.60	0.70
e	.026 BSC			0.65 BSC		
L	.008	.010	.012	0.20	0.25	0.30
R	.002	.004	.006	0.05	0.10	0.15
N	2			2		
aaa	.003			0.08		
bbb	.004			0.10		

NOTES:
1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).

Land Pattern - SLP1006P2

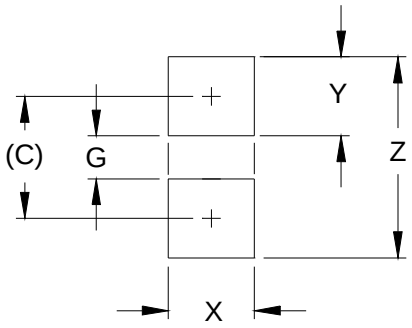

DIMENSIONS		
DIM	INCHES	MILLIMETERS
C	(.033)	(0.85)
G	.012	0.30
X	.024	0.60
Y	.022	0.55
Z	.055	1.40

NOTES:
1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY.
   CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR
   COMPANY'S MANUFACTURING GUIDELINES ARE MET.

Downloaded from Arrow.com.

Marking Codes



Notes:
1) Device is electrically symmetrical
2) Marking will also include line matrix date code

Ordering Information

Part Number	Qty per Reel	Reel Size
RClamp3521P.TNT	10,000	7 Inch

Notes:
RailClamp and RClamp are trademarks of Semtech Corporation

Carrier Tape Specification

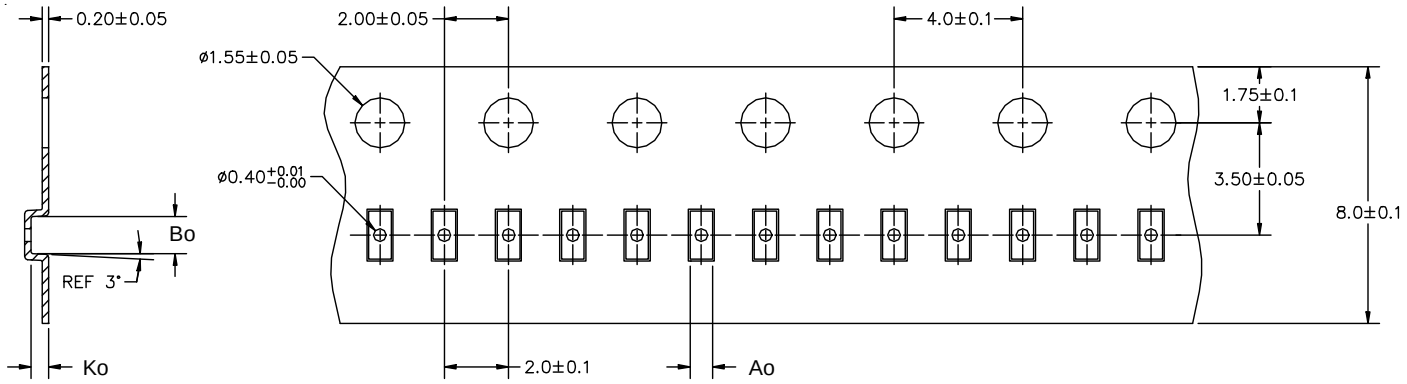

A0	B0	K0
0.69 +/-0.10 mm	1.19 +/-0.10 mm	0.66 +/-0.10 mm

Note: All dimensions in mm unless otherwise specified

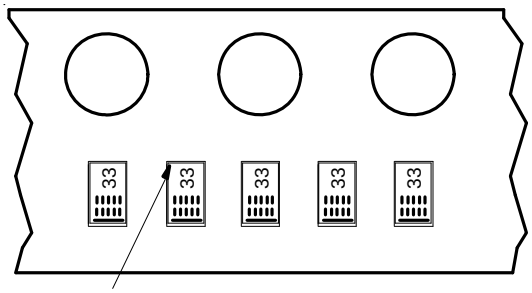

Pin 1 Location
(Towards Sprocket Holes)

Device Orientation in Tape

Downloaded from Arrow.com.

Contact Information

Semtech Corporation
Protection Products Division
200 Flynn Road, Camarillo, CA 93012
Phone: (805)498-2111 FAX (805)498-3804

Downloaded from Arrow.com.