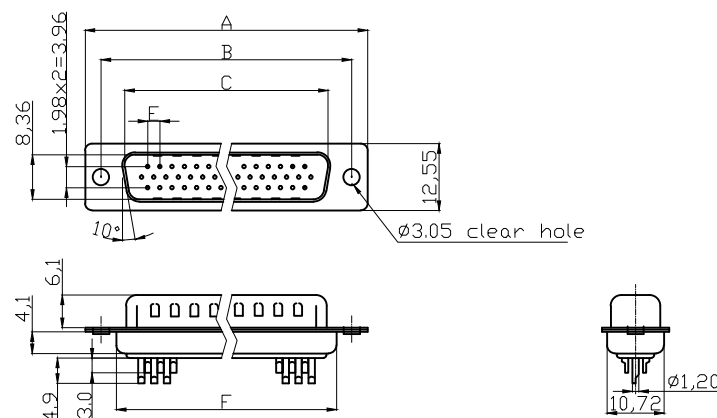
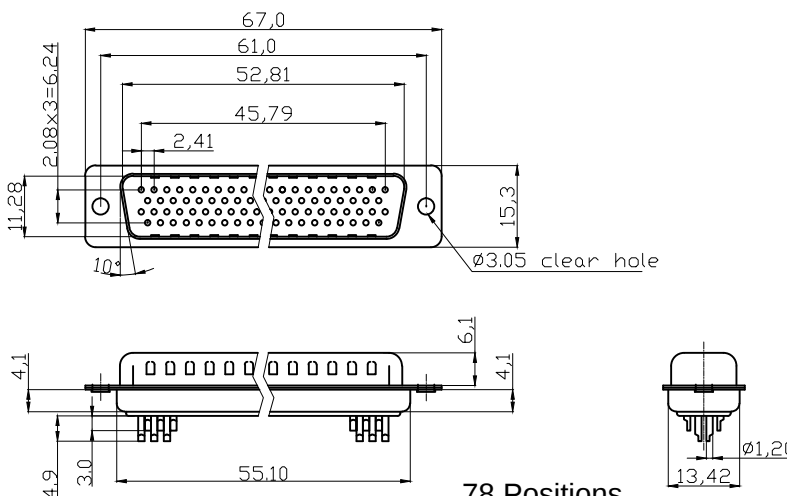


	1	2	3	4	5	6	7																																																																																					
A	Male 							A																																																																																				
B								B																																																																																				
C								C																																																																																				
D	 78 Positions							D																																																																																				
E								E																																																																																				
F								F																																																																																				
G	RoHS compliant Unit: mm  File No.: E198287 <table><tr><td>Scale</td><td>Free</td><td>⑤</td><td>Update operating temperature</td><td>22.12.2020</td><td>Luca</td><td></td><td>Date</td><td>Name</td><td>Description: D-SUB Connector</td></tr><tr><td colspan="2">TOLERANCE</td><td>④</td><td>Update order code and add more type of products</td><td>20.08.2019</td><td>Xavier</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td rowspan="3">ASSMANN WSW-No. A-HDS xx LL/Z-x</td></tr><tr><td>X.</td><td>±0.38</td><td>③</td><td>Add new type with front nut</td><td>07.08.2019</td><td>Xavier</td><td>Approved</td><td>19.10.2017</td><td>Winnie</td></tr><tr><td>X.X</td><td>±0.25</td><td>②</td><td>Add solder wire gauge</td><td>31.07.2019</td><td>Xavier</td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td>①</td><td>Add the mating cycles</td><td>19.10.2017</td><td>Winnie</td><td colspan="3" rowspan="3"></td><td>Drawing-No.</td><td rowspan="3">ASS 4895 CO</td><td rowspan="3">rev05</td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Add the mating cycles</td><td>19.10.2017</td><td>Winnie</td></tr><tr><td>X.°</td><td>±3°</td><td>①</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td></tr><tr><td>X.X°</td><td>±1.0°</td><td>①</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td colspan="3"></td><td>Customer-No.</td><td>Sheet 1/3</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="5"></td></tr></table>							Scale	Free	⑤	Update operating temperature	22.12.2020	Luca		Date	Name	Description: D-SUB Connector	TOLERANCE		④	Update order code and add more type of products	20.08.2019	Xavier	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-HDS xx LL/Z-x	X.	±0.38	③	Add new type with front nut	07.08.2019	Xavier	Approved	19.10.2017	Winnie	X.X	±0.25	②	Add solder wire gauge	31.07.2019	Xavier				X.XX	±0.13	①	Add the mating cycles	19.10.2017	Winnie				Drawing-No.	ASS 4895 CO	rev05	DIM	TOL	①	Add the mating cycles	19.10.2017	Winnie	X.°	±3°	①	Drawn	15.08.2012	Lucas	X.X°	±1.0°	①	Drawn	15.08.2012	Lucas				Customer-No.	Sheet 1/3	Angle	TOL	Id.	Modification	Date	Name						G
Scale	Free	⑤	Update operating temperature	22.12.2020	Luca		Date	Name	Description: D-SUB Connector																																																																																			
TOLERANCE		④	Update order code and add more type of products	20.08.2019	Xavier	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-HDS xx LL/Z-x																																																																																			
X.	±0.38	③	Add new type with front nut	07.08.2019	Xavier	Approved	19.10.2017	Winnie																																																																																				
X.X	±0.25	②	Add solder wire gauge	31.07.2019	Xavier																																																																																							
X.XX	±0.13	①	Add the mating cycles	19.10.2017	Winnie				Drawing-No.	ASS 4895 CO	rev05																																																																																	
DIM	TOL	①	Add the mating cycles	19.10.2017	Winnie																																																																																							
X.°	±3°	①	Drawn	15.08.2012	Lucas																																																																																							
X.X°	±1.0°	①	Drawn	15.08.2012	Lucas				Customer-No.	Sheet 1/3																																																																																		
Angle	TOL	Id.	Modification	Date	Name																																																																																							
H								H																																																																																				
	1	2	3	4	5	6	7																																																																																					

NOTES:

Material

Insulator Material: Glass-filled thermoplastic PBT,UL94V-0 rated,Black
Contact Material: Copper alloy, Gold flash selective gold plating
Shell: Steel, 100 µ" Tin Over 50µ" min Copper

Electrical

Contact Resistance: 20m ohms Max at 1 AMP DC.
Insulation Resistance: 1000M ohms at 500 VDC
Withstanding Voltage: 1000 VAC/rms 60Hz for 1 minute
Current Rating: 3 AMP
Voltage Rating: 250 VAC/rms 60Hz
① Durability: 250 mating cycles
⑤ Operating Temperature: -55°C ~ +105°C
② Wire gauge: 24~30AWG

④③ Order Code:

A-HDx xx LL/Z - x

Contact style:
F - Female
S - Male
No. of Contacts
15 / 26 / 44 / 62

Blank - Without nut
UNC1 - With front nut H=5.9mm
UNC2 - With rear nut H=5.9mm
UNC3 - With front nut H=2.0mm
UNC4 - With front nut H=2.5mm
UNC5 - With front nut H=4.0mm
UNC6 - With rear nut H=2.0mm
UNC7 - With rear nut H=2.5mm

Dimensions

Positions	A	B	C	E	F
15	30.81	24.99	16.92	2.29	19.20
26	39.20	33.30	25.25	2.29	27.70
44	53.04	47.04	38.96	2.29	41.10
62	69.40	63.50	55.42	2.41	57.30

RoHS compliant

Unit: mm



File No.: E198287

ASSMANN
WSW components

Drawing-No.

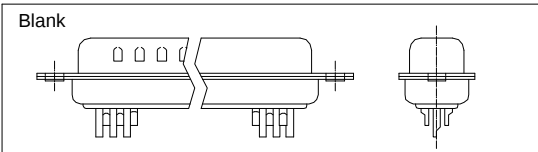
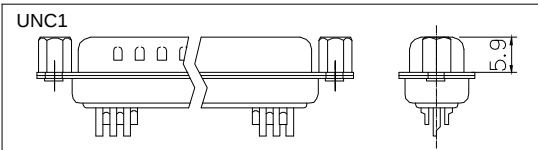
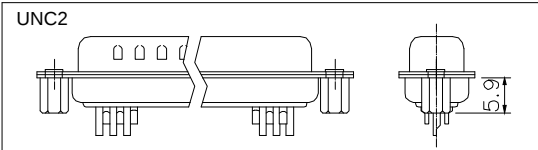
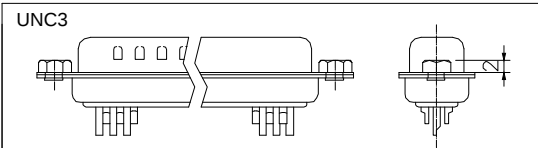
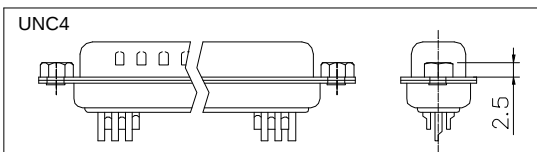
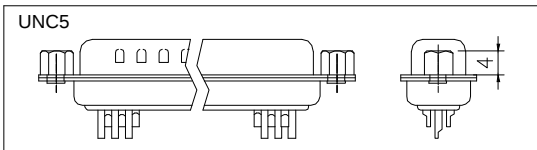
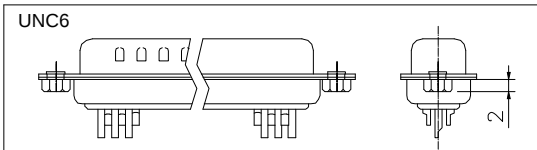
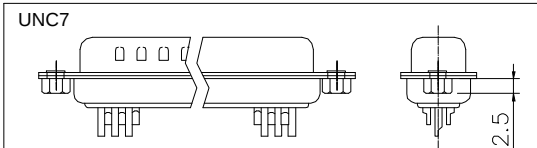
ASS 4895 CO

rev05

Customer-No.

Sheet
1/3

	1	2	3	4	5	6	7																															
A	Female							A																														
B	NOTES: Material Insulator Material: Glass-filled thermoplastic PBT,UL94V-0 rated,Black Contact Material: Copper alloy, Gold flash selective gold plating Shell: Steel, 100 µ" Tin Over 50µ" min Copper Electrical Contact Resistance: 20m ohms Max at 1 AMP DC. Insulation Resistance: 1000M ohms at 500 VDC Withstanding Voltage: 1000 VAC/rms 60Hz for 1 minute Current Rating: 3 AMP Voltage Rating: 250 VAC/rms 60Hz ① Durability: 250 mating cycles ⑤ Operating Temperature: -55°C ~ +105°C ② Wire gauge: 24~30AWG							B																														
C								C																														
D	④③ Order Code: A-HDx xx LL/Z - x Contact style: F - Female S - Male No. of Contacts: 15 / 26 / 44 / 62 Blank - Without nut UNC1 - With front nut H=5.9mm UNC2 - With rear nut H=5.9mm UNC3 - With front nut H=2.0mm UNC4 - With front nut H=2.5mm UNC5 - With front nut H=4.0mm UNC6 - With rear nut H=2.0mm UNC7 - With rear nut H=2.5mm							D																														
E	Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>F</th></tr><tr><td>15</td><td>30.81</td><td>24.99</td><td>16.33</td><td>2.29</td><td>19.20</td></tr><tr><td>26</td><td>39.20</td><td>33.30</td><td>24.70</td><td>2.29</td><td>27.70</td></tr><tr><td>44</td><td>53.04</td><td>47.04</td><td>38.40</td><td>2.29</td><td>41.10</td></tr><tr><td>62</td><td>69.40</td><td>63.50</td><td>54.80</td><td>2.41</td><td>57.30</td></tr></table>							Positions	A	B	D	E	F	15	30.81	24.99	16.33	2.29	19.20	26	39.20	33.30	24.70	2.29	27.70	44	53.04	47.04	38.40	2.29	41.10	62	69.40	63.50	54.80	2.41	57.30	E
Positions	A	B	D	E	F																																	
15	30.81	24.99	16.33	2.29	19.20																																	
26	39.20	33.30	24.70	2.29	27.70																																	
44	53.04	47.04	38.40	2.29	41.10																																	
62	69.40	63.50	54.80	2.41	57.30																																	
F	78 Positions							F																														
G	RoHS compliant Unit: mm File No.: E198287		Scale	Free	⑤	Update operating temperature	22.12.2020	Luca		Date	Name	Description: D-SUB Connector	G																									
TOLERANCE			④	Update order code and add more type of products	20.08.2019	Xavier	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-HDF xx LL/Z-x																												
X.			±0.38	③	Add new type with front nut	07.08.2019	Xavier	Approved	22.12.2020			Luca																										
X.X			±0.25	②	Add solder wire gauge	31.07.2019	Xavier				Drawing-No.																											
H			X.XX	±0.13	①	Add the mating cycles	19.10.2017	Winnie				ASS 4895 CO	rev05	H																								
DIM			TOL	①	Add the mating cycles	19.10.2017	Winnie	Customer-No.				Sheet 2/3																										
X.°			±3°	①	Drawn	15.08.2012	Lucas																															
X.X°			±1.0°	①	Drawn	15.08.2012	Lucas																															
	Angle	TOL	Id.	Modification	Date	Name																																
	1	2	3	4	5	6	7																															

	1	2	3	4	5	6	7								
A	④③ Order Code: A-HDx xx LL/Z - x Contact style: F - Female S - Male No. of Contacts 15 / 26 / 44 / 62 Blank - Without nut UNC1 - With front nut H=5.9mm UNC2 - With rear nut H=5.9mm UNC3 - With front nut H=2.0mm UNC4 - With front nut H=2.5mm UNC5 - With front nut H=4.0mm UNC6 - With rear nut H=2.0mm UNC7 - With rear nut H=2.5mm							A							
B								B							
C	Blank 							C							
D	UNC1 							D							
E	UNC2 							E							
F	UNC3 							F							
	UNC4 														
	UNC5 														
	UNC6 														
	UNC7 														
G	RoHS compliant Unit: mm  File No.: E198287		Scale	Free	⑤	Update operating temperature	22.12.2020	Luca		Date	Name	Description: D-SUB Connector		G	
			TOLERANCE		④	Update order code and add more type of products	20.08.2019	Xavier	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-HDx xx LL/Z-x			
			X.	±0.38	③	Add new type with front nut	07.08.2019	Xavier	Approved	22.12.2020	Luca				
			X.X	±0.25	②	Add solder wire gauge	31.07.2019	Xavier							
			X.XX	±0.13	①	Add the mating cycles	19.10.2017	Winnie				Drawing-No.			
H			DIM	TOL	①	Add the mating cycles	19.10.2017	Winnie				ASS 4895 CO		rev05	H
			X.°	±3°	①	Drawn	15.08.2012	Lucas				Customer-No.			
			X.X°	±1.0°	①	Drawn	15.08.2012	Lucas							
			Angle	TOL	Id.	Modification	Date	Name				Sheet 3/3			
	1	2	3	4	5	6	7								